


AIR HYDRAULIC JACKING BEAM SD32PHL

AIR HYDRAULIC JACKING BEAM FOR PASSENGER CARS AND VANS

Item number: 6300000

- ✓ Low minimum height of 230 mm
- ✓ Flexible top support beam can be extended up to 1610 mm
- ✓ Two-hand lowering operation with dead man's release, automatic safety locking device and overload valve for optimum safety

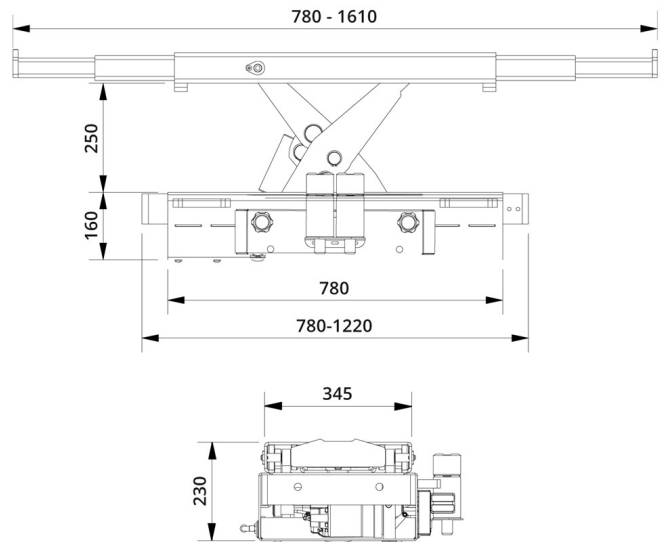

Capacity:	3,2 t
Stroke:	250 mm
Min height:	230 mm
Width without mounting brackets:	780 - 1220 mm
Lifting frame height:	160 mm
Lifting frame depth:	345 mm
Air supply:	8 - 10 bar
Air consumption:	400 - 700 l/min
Weight:	175 kg

AIR HYDRAULIC JACKING BEAM

ACCESSORIES SD32PHL:

HSD


Air-line connection



Item number: 6232500

FSD1

Extension



Item number: 6212500

FSD2

Rubber support



Item number: 0298900

FSD3

Rubber support



Item number: 0299000

FSD4

Extension



Item number: 6212600

FSD6

Adjustable saddle



Item number: 6214300

FSD7

Extension



Item number: 6214100

GS2

Rubber cushion



Item number: 6217200

AIR HYDRAULIC JACKING BEAM

ACCESSORIES SD32PHL:

GS1

Rubber cushion for protection of
car body



Item number: 3601400